


Parcel 8

Parcel 7

Parcel 9

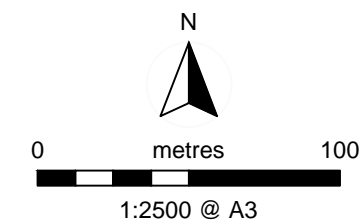

GSB Prospection Ltd
Cowburn Farm, 21 Market Street
Thornton
Bradford
BD13 3HW
+44 (0)1274 835016



Project: G1536 Three Elms, Huntington, Hereford

Title: Magnetometer Survey - Parcels 7, 8 and 9:
Greyscale Plots

Based on the Ordnance Survey Map provided by the client. Reproduced with
the permission of the Controller of HMSO Crown Copyright (AL100018665)

Drawn by: JMT

Figure 11



Appendix - Technical Information: Magnetometer Survey

Instrumentation: Bartington *Grad601-2* / GSB CARTEASY^N Cart system

Both the Bartington and CARTEASY^N instruments operate in a gradiometer configuration which comprises fluxgate sensors mounted vertically, set 1.0m apart. The fluxgate gradiometer suppresses any diurnal or regional effects. The instruments are carried, or cart mounted, with the bottom sensor approximately 0.1-0.3m from the ground surface. At each survey station, the difference in the magnetic field between the two fluxgates is measured in nanoTesla (nT). The sensitivity of the instrument can be adjusted; for most archaeological surveys the most sensitive range (0.1nT) is used. Generally, features up to 1m deep may be detected by this method. The Bartington instrument can collect two lines of data per traverse with gradiometer units mounted laterally with a separation of 1.0m. The CARTEASY^N system has four gradiometer units mounted at 0.75m intervals across its frame – rather than working in grids, the cart uses an on-board survey grade GNSS for positioning. The cart system allows for the collection of topographic data in addition to the magnetic field measurements.

Data Processing

Zero Mean Traverse	This process sets the background mean of each traverse within each grid to zero. The operation removes striping effects and edge discontinuities over the whole of the data set.
Step Correction (Destagger)	When gradiometer data are collected in 'zig-zag' fashion, stepping errors can sometimes arise. These occur because of a slight difference in the speed of walking on the forward and reverse traverses. The result is a staggered effect in the data, which is particularly noticeable on linear anomalies. This process corrects these errors.
Interpolation	When geophysical data are presented as a greyscale, each data point is represented as a small square. The resulting plot can sometimes have a 'blocky' appearance. The interpolation process calculates and inserts additional values between existing data points. The process can be carried out with points along a traverse (the x axis) and/or between traverses (the y axis) and results in a smoother greyscale image.

Display

XY Trace Plot	This involves a line representation of the data. Each successive row of data is equally incremented in the Y axis, to produce a stacked profile effect. This display may incorporate a hidden-line removal algorithm, which blocks out lines behind the major peaks and can aid interpretation. The advantages of this type of display are that it allows the full range of the data to be viewed and shows the shape of the individual anomalies. The display may also be changed by altering the horizontal viewing angle and the angle above the plane.
Greyscale/ Colourscale Plot	This format divides a given range of readings into a set number of classes. Each class is represented by a specific shade of grey, the intensity increasing with value. All values above the given range are allocated the same shade (maximum intensity); similarly all values below the given range are represented by the minimum intensity shade. Similar plots can be produced in colour, either using a wide range of colours or by selecting two or three colours to represent positive and negative values. The assigned range (plotting levels) can be adjusted to emphasise different anomalies in the data-set.
3D Surface Plot	This is similar to the XY trace, but in 3 dimensions. Each data point of a survey is represented in its relative position on the x and y axes and the data value is represented in the z axis. This gives a digital terrain, or topographic effect.

Interpretation Categories

In certain circumstances (usually when there is corroborative evidence from desk based or excavation data) very specific interpretations can be assigned to magnetic anomalies (for example, *Roman Road, Wall*, etc.) and where appropriate, such interpretations will be applied. The list below outlines the generic categories commonly used in the interpretation of the results.

<i>Archaeology</i>	This term is used when the form, nature and pattern of the response are clearly or very probably archaeological and /or if corroborative evidence is available. These anomalies, whilst considered anthropogenic, could be of any age.
<i>?Archaeology</i>	These anomalies exhibit either weak signal strength and / or poor definition, or form incomplete archaeological patterns, thereby reducing the level of confidence in the interpretation. Although the archaeological interpretation is favoured, they may be the result of variable soil depth, plough damage or even aliasing as a result of data collection orientation.
<i>Increased Magnetic Response</i>	An area where increased fluctuations attest to greater magnetic enhancement of the soils, but no specific patterns can be discerned in the data and no visual indications on the ground surface hint at a cause. They may have some archaeological potential, suggesting damaged archaeological deposits.
<i>Industrial / Burnt-Fired</i>	Strong magnetic anomalies that, due to their shape and form or the context in which they are found, suggest the presence of kilns, ovens, corn dryers, metal-working areas or hearths. It should be noted that in many instances modern ferrous material can produce similar magnetic anomalies.
<i>Old Field Boundary</i>	Anomalies that correspond to former boundaries indicated on historic mapping, or which are clearly a continuation of existing land divisions.
<i>Ridge & Furrow</i>	Parallel linear anomalies whose broad spacing suggests ridge and furrow cultivation. In some cases the response may be the result of more recent agricultural activity.
<i>Ploughing</i>	Parallel linear anomalies or trends with a narrower spacing, sometimes aligned with existing boundaries, indicating more recent cultivation regimes.
<i>Natural</i>	These responses form clear patterns in geographical zones where natural variations are known to produce significant magnetic distortions. Smaller, isolated responses which do not form such obviously 'natural' patterns but which are, nonetheless, likely to be natural in origin may be classified as <i>?Natural</i> .
<i>Uncertain Origin</i>	Anomalies which stand out from the background magnetic variation, yet whose form and lack of patterning gives little clue as to their origin. Often the characteristics and distribution of the responses straddle the categories of <i>?Archaeology</i> and <i>?Natural</i> or (in the case of linear responses) <i>?Archaeology</i> and <i>?Ploughing</i> ; occasionally they are simply of an unusual form.
<i>Magnetic Disturbance</i>	Broad zones of strong dipolar anomalies, commonly found in places where modern ferrous or fired materials (e.g. brick rubble) are present. They are presumed to be modern.
<i>Ferrous</i>	This type of response is associated with ferrous material and may result from small items in the topsoil, larger buried objects such as pipes, or above ground features such as fence lines or pylons. Ferrous responses are usually regarded as modern. Individual burnt stones, fired bricks or igneous rocks can produce responses similar to ferrous material.

Where appropriate some anomalies will be further classified according to their form (positive or negative) and relative strength and coherence (trend: weak and poorly defined).

Survey services you can rely on

Your Survey Partner

For a complete and complementary range of survey services.

*Survey services
you can rely on*

- Archaeological
- As Built Records
- Boundary Disputes
- CCTV
- Geophysical
- Laser Scanning
- Measured Building
- Pipeline Routes
- Railway
- Retrofit
- Setting Out
- Statutory Plan Collation
- Topographic
- Utility Mapping
- UXO Detection
- Void Detection



GSB

PROSPECTION Ltd

Celebrating over 25 years at the
forefront of archaeological geophysics



Tel: +44 (0)1274 835016
Fax: +44 (0)1274 830212
Email: info@gsbsumo.com
Web: www.gsbprospection.com