


The Clearwater P6 Sewage Treatment Plant

The Clearwater P6 uses a aeration chamber rather than a rotating disc as in the Biodisc system.

Benefits:

- High performance rating.
- Can be discharged directly to a watercourse.
- Free from mechanical or electrical components within the unit - very low maintenance and running costs.
- Minimal visual impact on surroundings - low level cover with child safe locks.
- Controlled ventilation - odour free.
- Annual de-sludging.

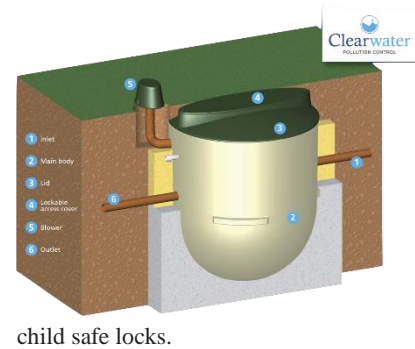

Model Type		6	12	18
Model Ref.		E006G10A0B	E012G10A0B	E018G10A0B
Max. No. of Full-time Residents	p/day	6	12	18
Average Flow	m ³ /day	1.20	2.40	3.60
BOD Load	kg/day	0.36	0.72	1.10
Weight Empty	kg	200	217	445
Overall Diameter	m	1.85	1.85	2.70
Overall Depth	m	2.20	2.70	2.60
Inlet Invert	m	1.00*	1.00*	1.00*
Inlet Invert to Base	m	1.20	1.70	1.60
Outlet Invert	m	1.10**	1.10**	1.10**
Blower Motor Rating	Watts	60	60	1.50
Drainage Fitting	mm	110	110	110

