

Septic Tanks


NC 05 / 3879 / F

Titan pollution control are part of a group of companies which form the largest rotational moulders of plastic products in Europe. They are a company whose name is synonymous with excellent design, high quality materials and good customer service.

Titan Septic tanks are made from the finest quality polyethylene and are guaranteed for ten years' trouble free use.

Titan's nationwide coverage ensures prompt delivery and complete after sales service to every customer.

- Titan septic tanks will save you money because they will last longer. ("...will have a life in excess of 30 years" - British Board of Agreement)
- They are robust, with high impact resistance, and can withstand all common chemicals they are likely to encounter.
- Titan septic tanks are trouble-free. No chemicals are required for bacterial action to take place.
- Titan septic tanks are strong, easy to move and simple to install. Full installation instructions are supplied with every tank.
- An extension neck is available to allow for deeper installation on difficult sites.
- Titan septic tanks come in capacities of 2,730 litres (600 gallons) and 3,635 litres (800 gallons) and meet all the requirements of the Water Act Consent Regulations and Building Control Regulations. They were awarded a British Agreement Certificate - your assurance of quality - in October, 1990.

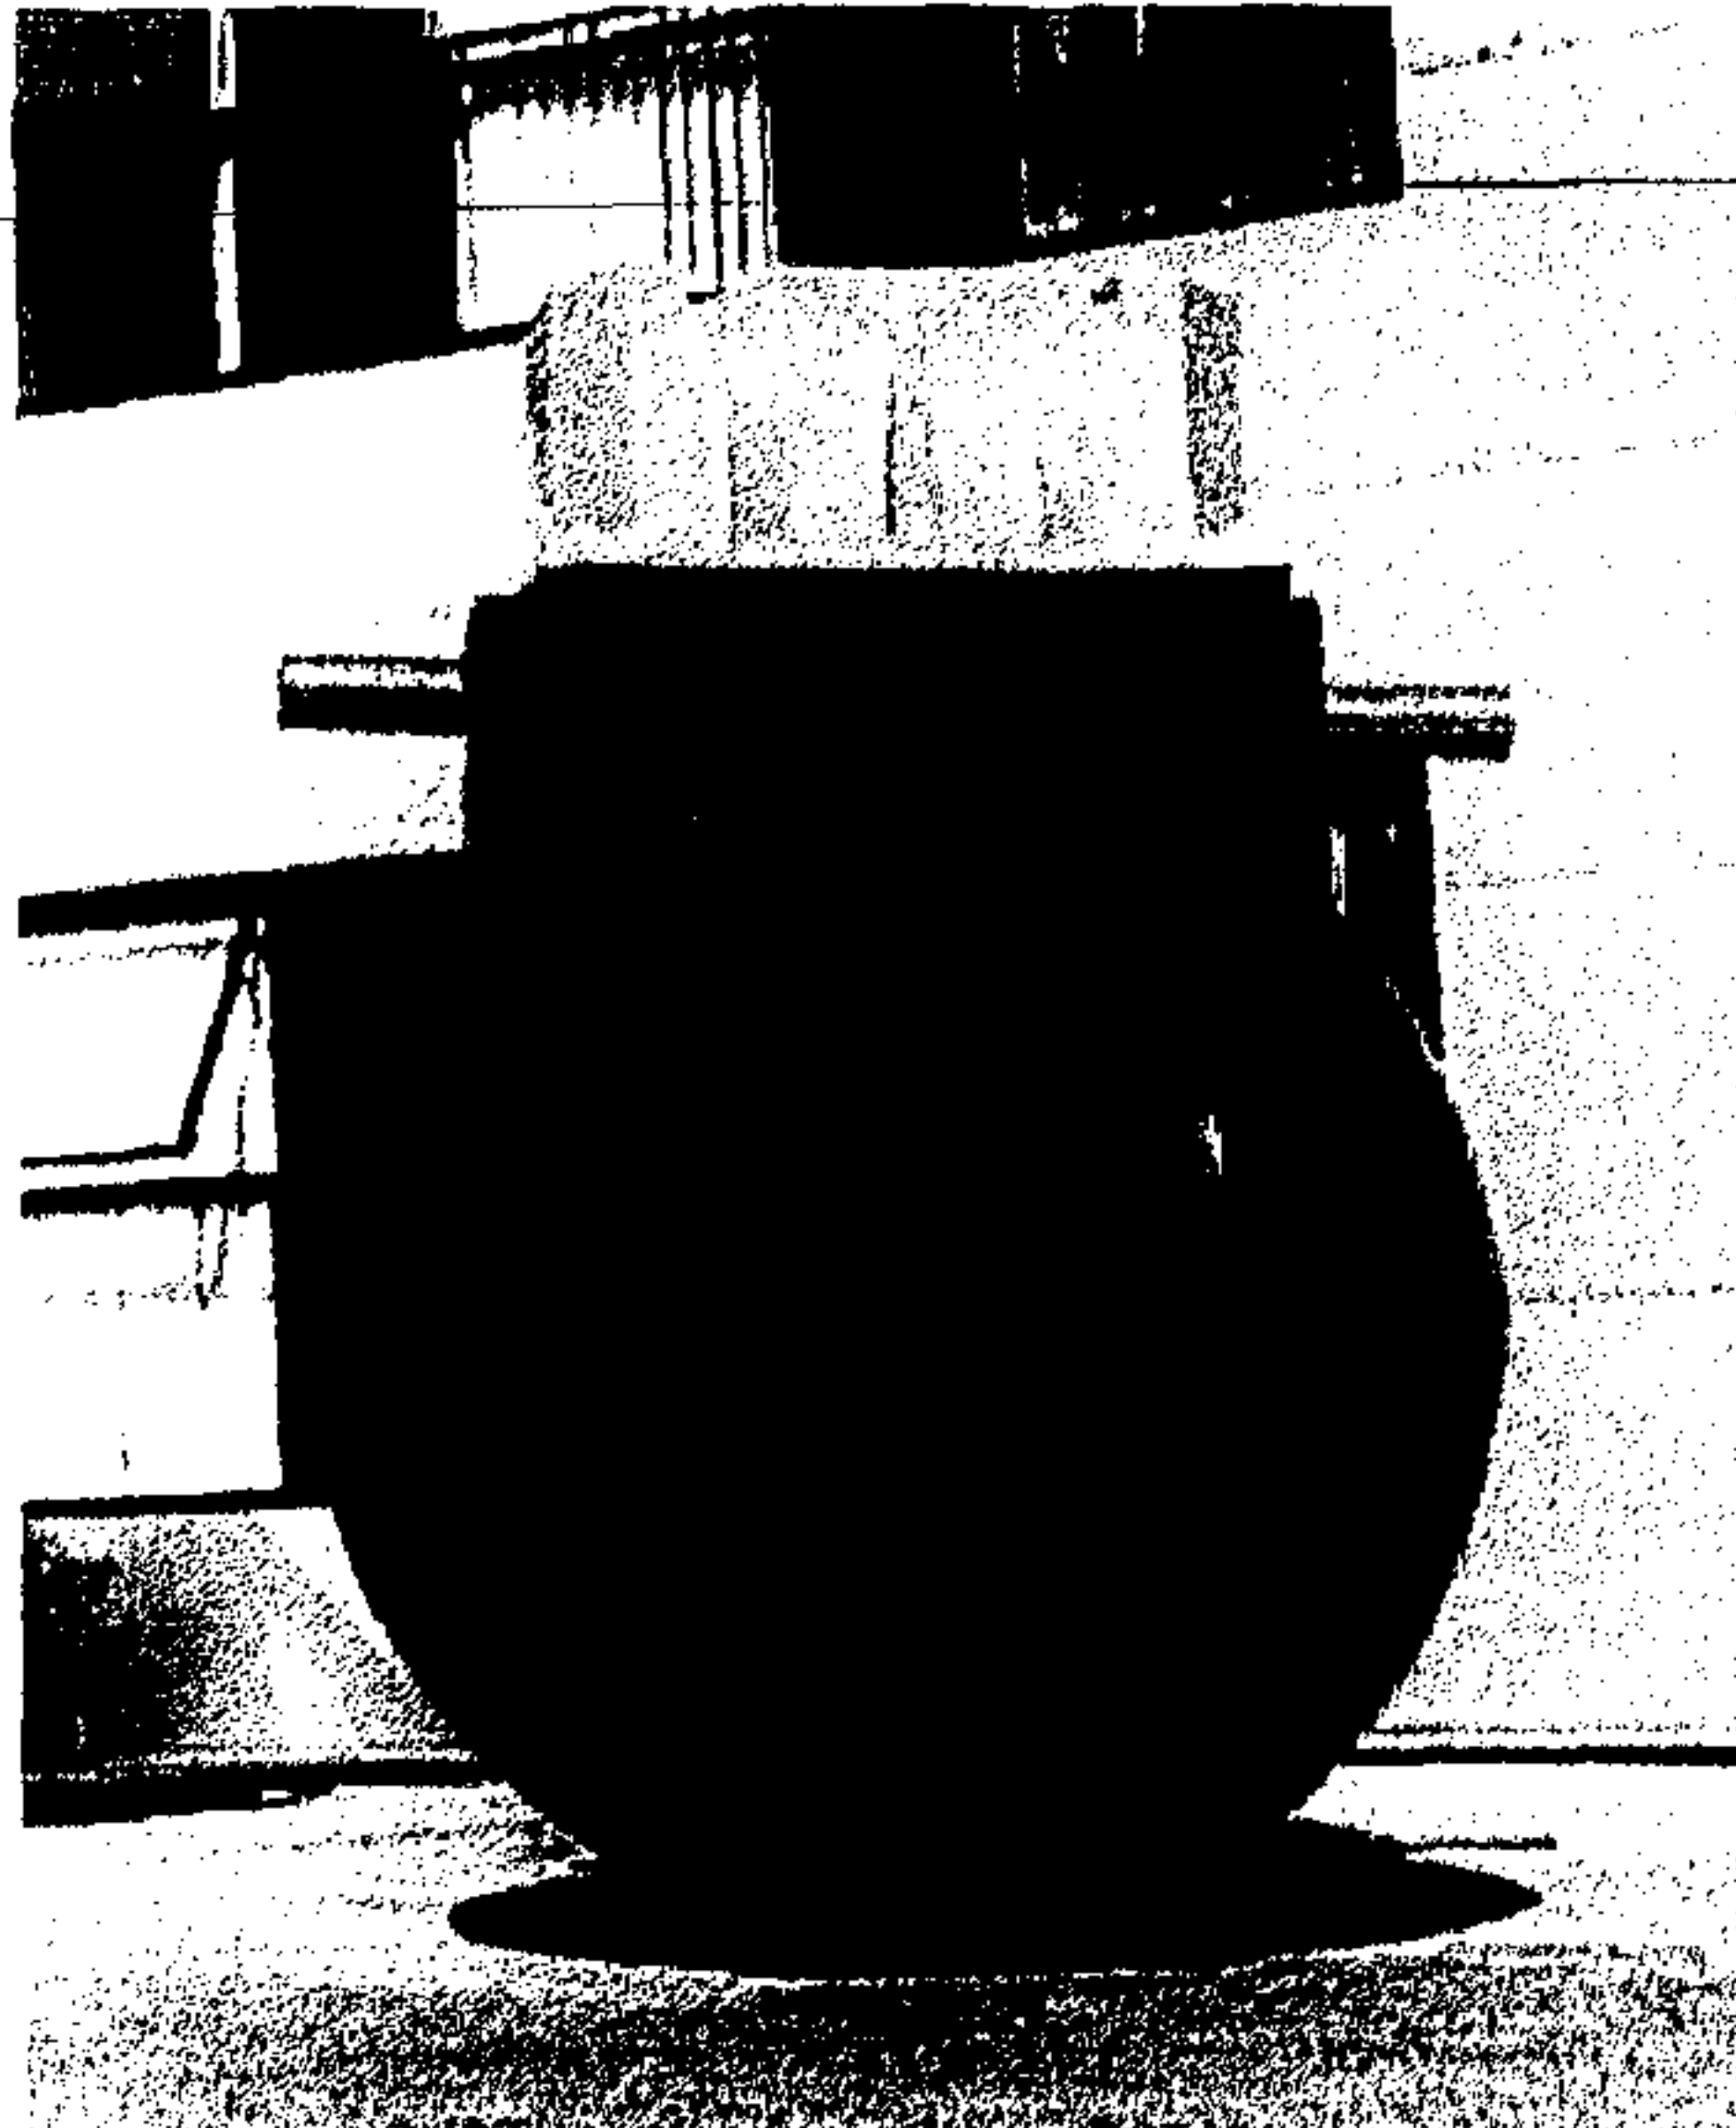


- All Titan septic tanks carry a ten-year guarantee.
- Titan's modern design means that access for desludging is easier through the wide neck.

HERFORDSHIRE COUNTY COUNCIL
PLANNING DEPT
DEVELOPMENT CONTROL


28 NOV 2005

Arrows show the flow path of the liquid

Tank Dimensions

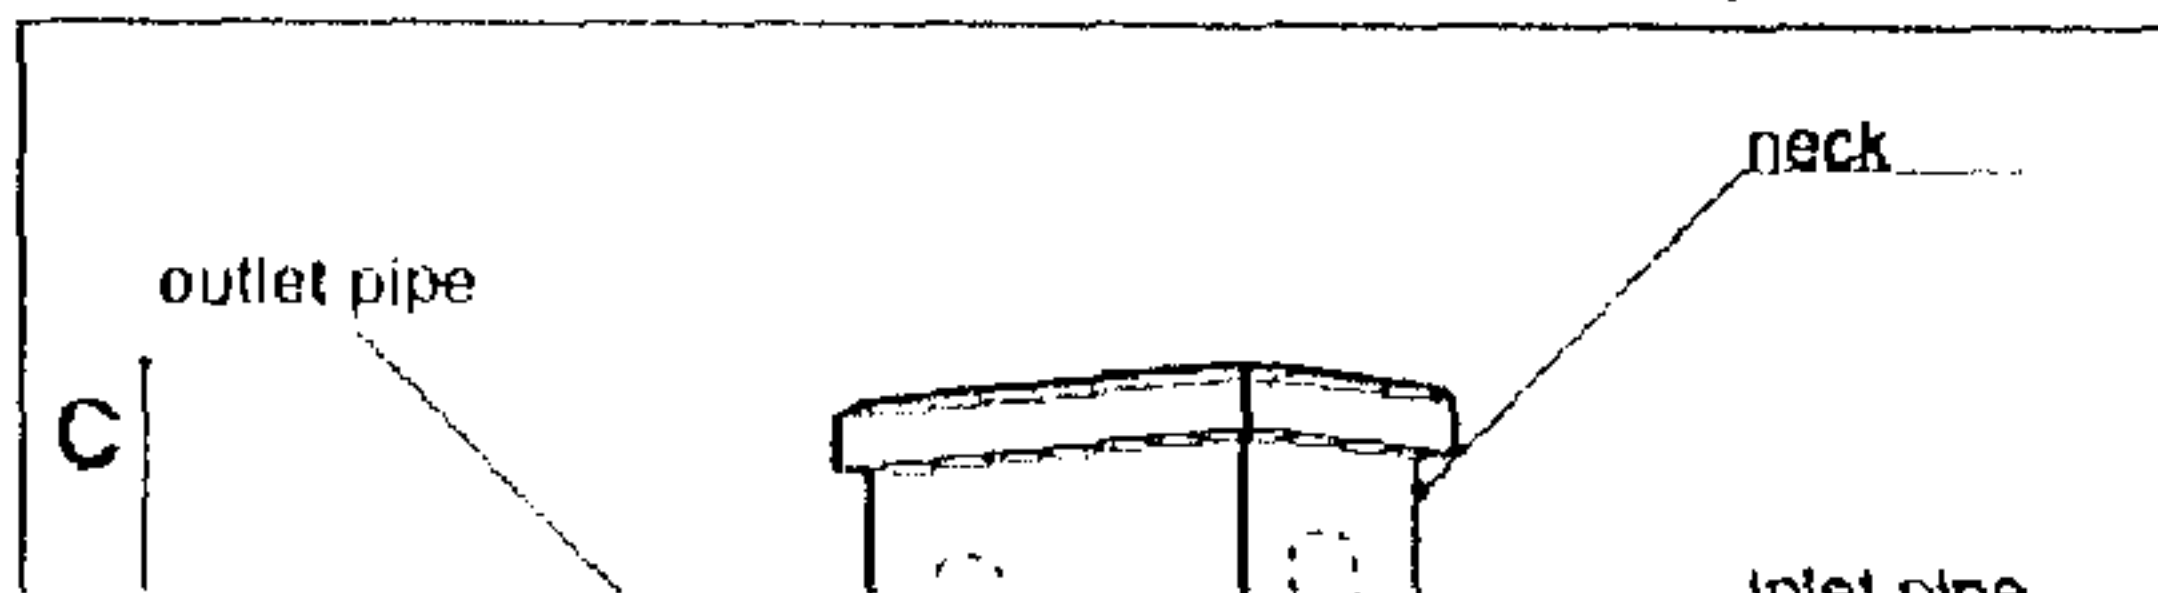

Litres/Gallons	A m/ft	B m/ft	C m/ft
2730 / 600	1.76 / 5'9"	1.96 / 6'6"	0.46 / 1'6"
3635 / 800	1.94 /	2.12 /	0.46 /

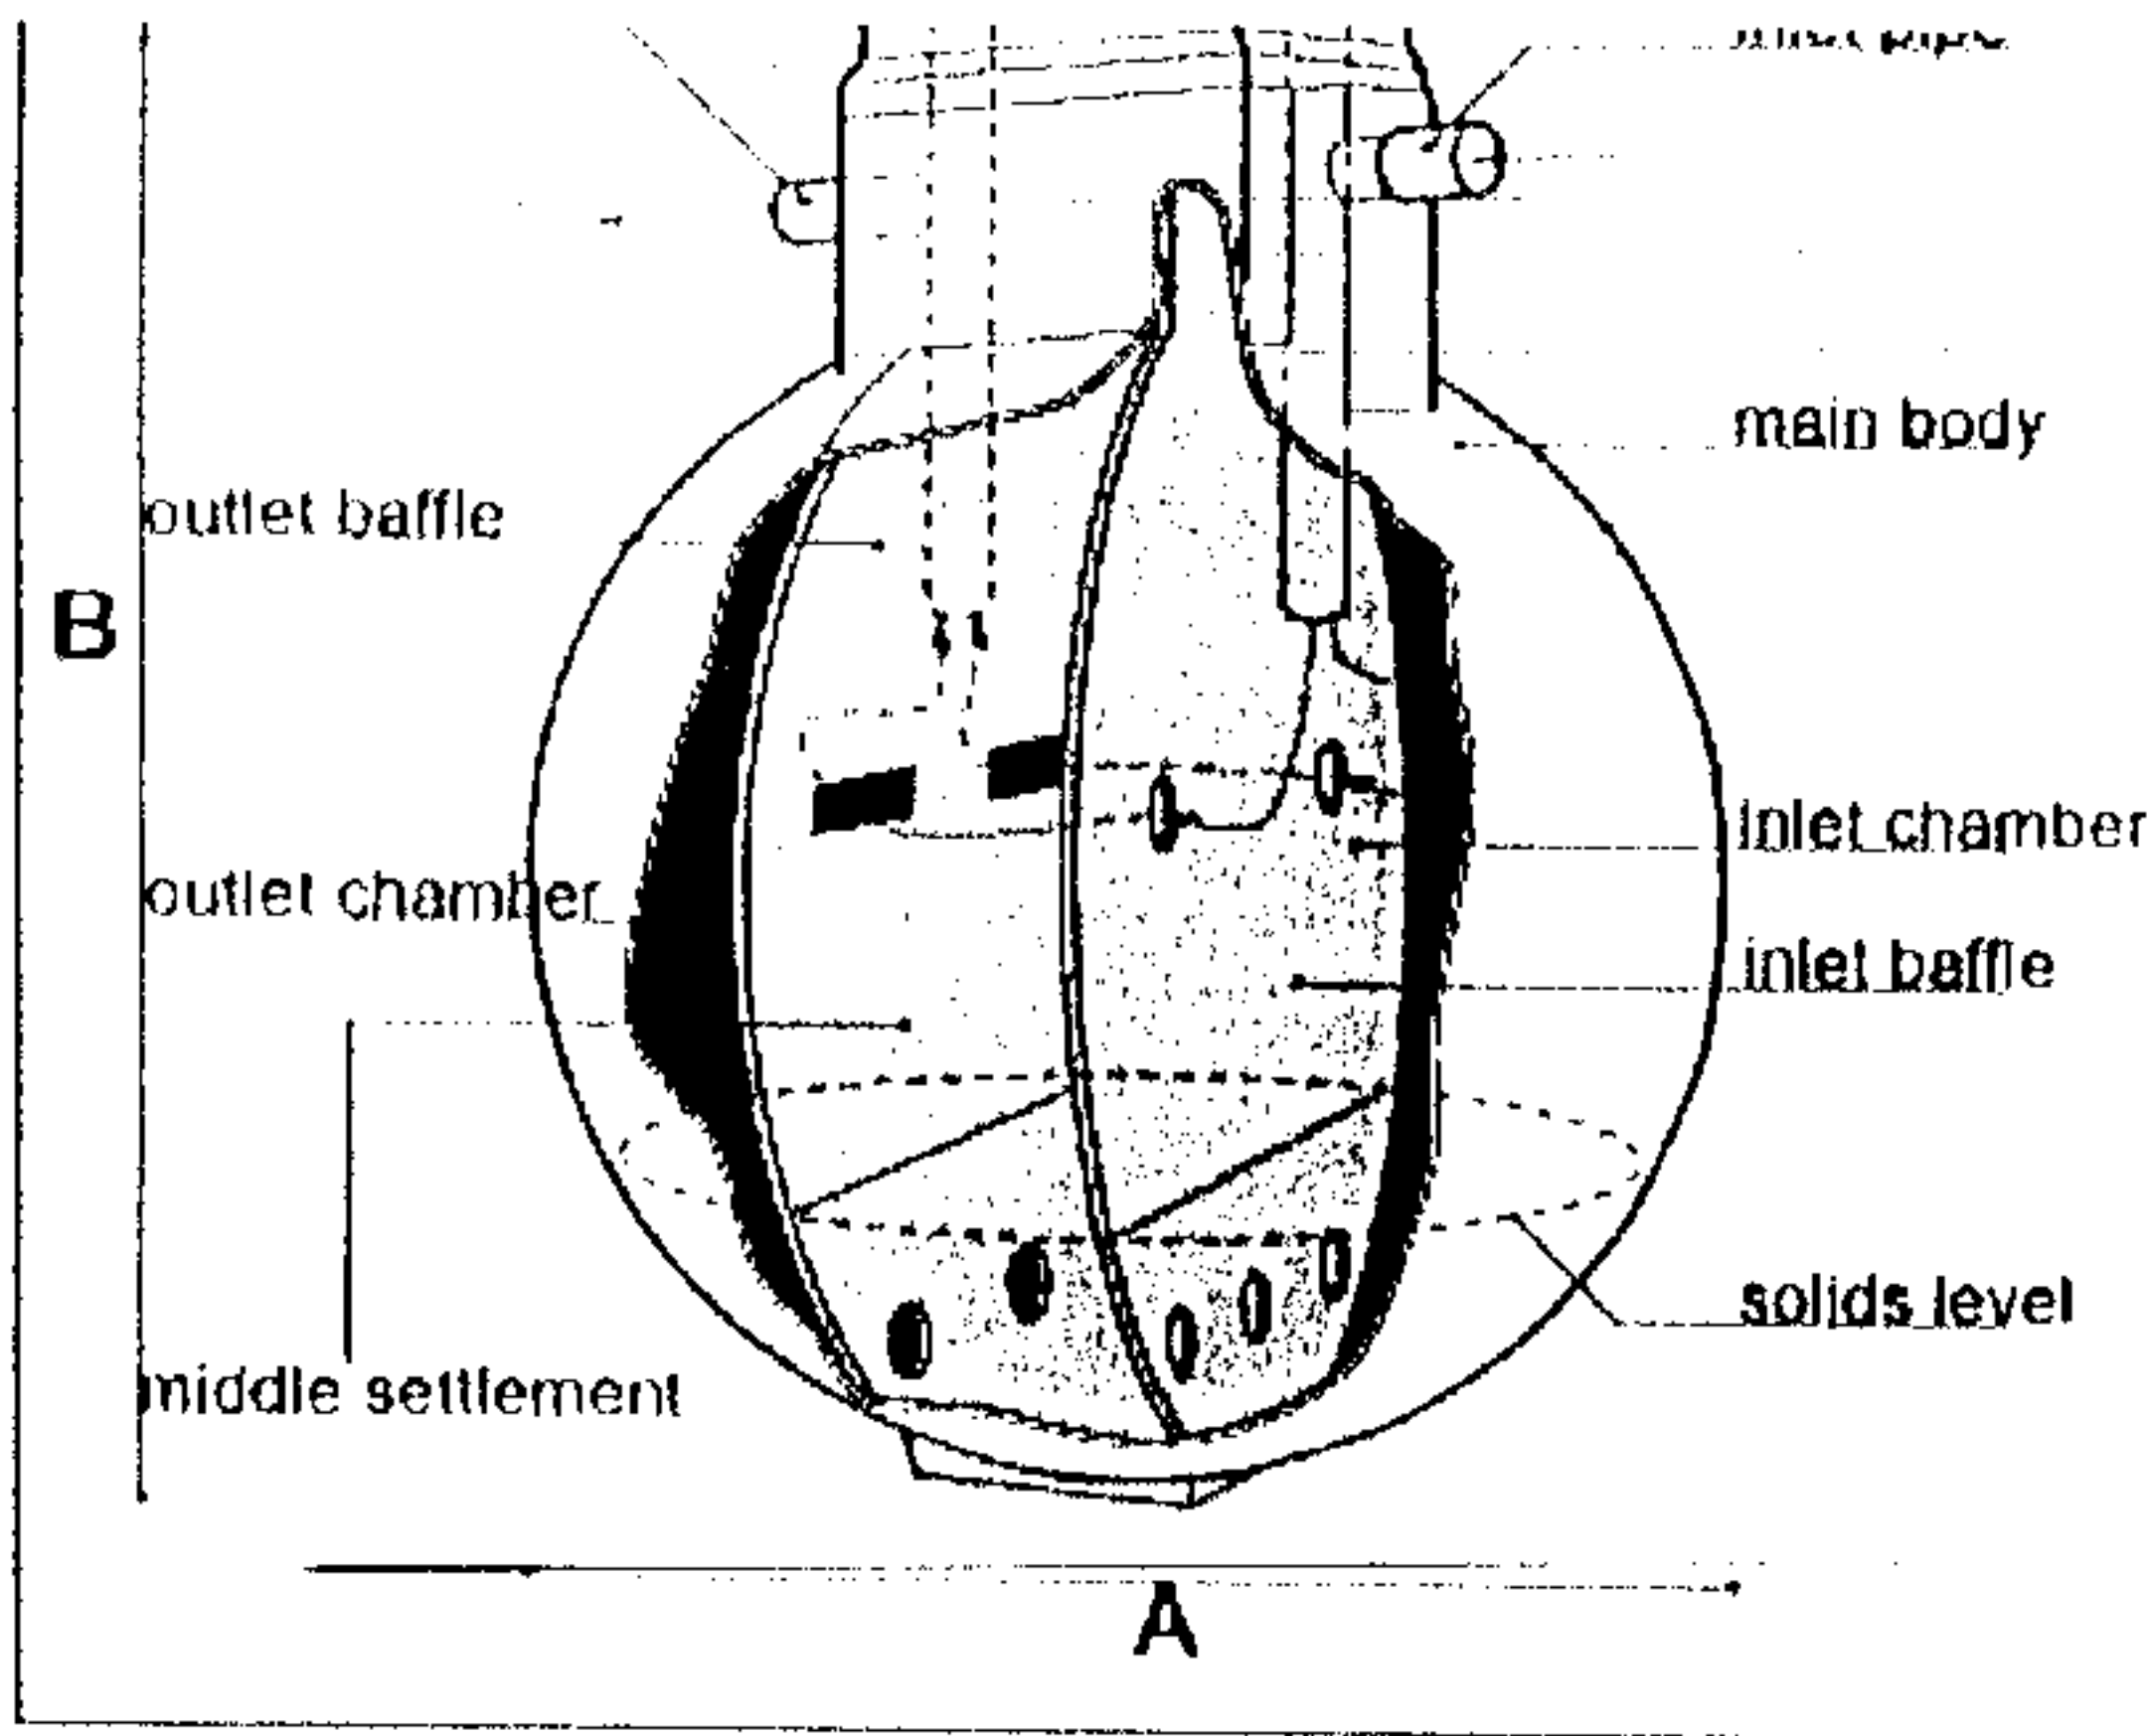

NC 05 / 3879 / F


Technical Details

INSTALLATION


There are basically two ground types;

Dry Ground Conditions - in light, totally dry, free-draining soils where the water table does not rise above the base of the tank.

Wet Ground Conditions - In clay or heavy soils where the water table can rise above the base of the tank.

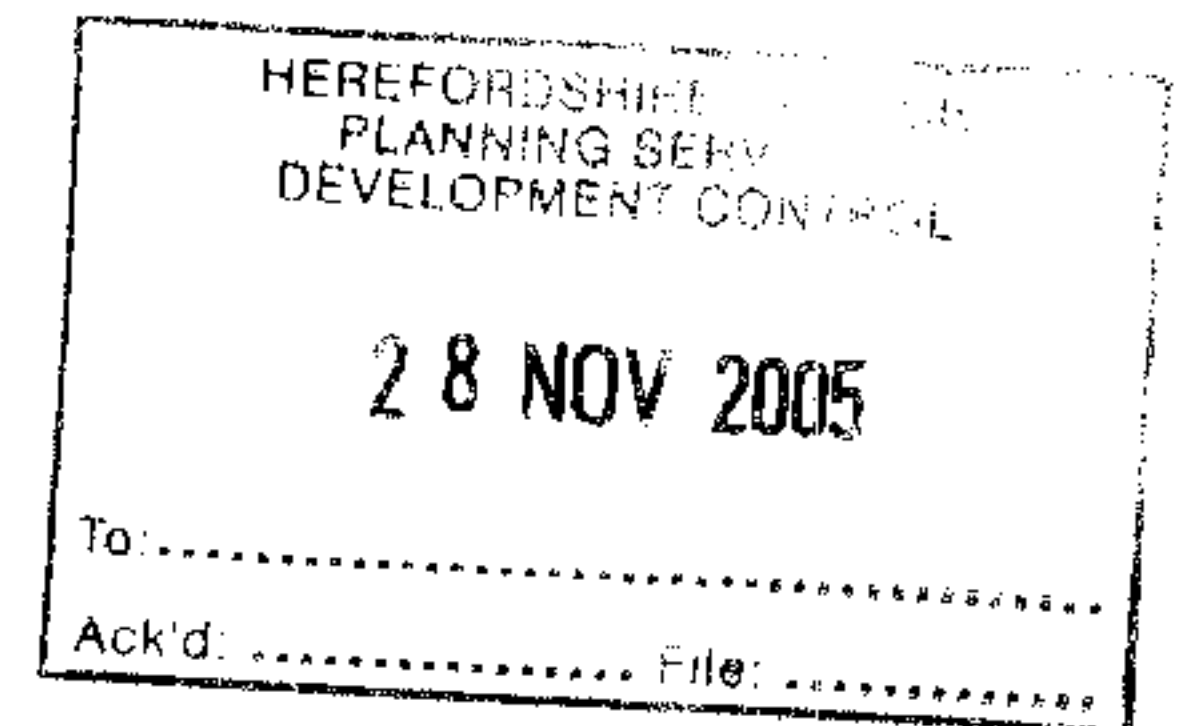


Dry Ground Conditions

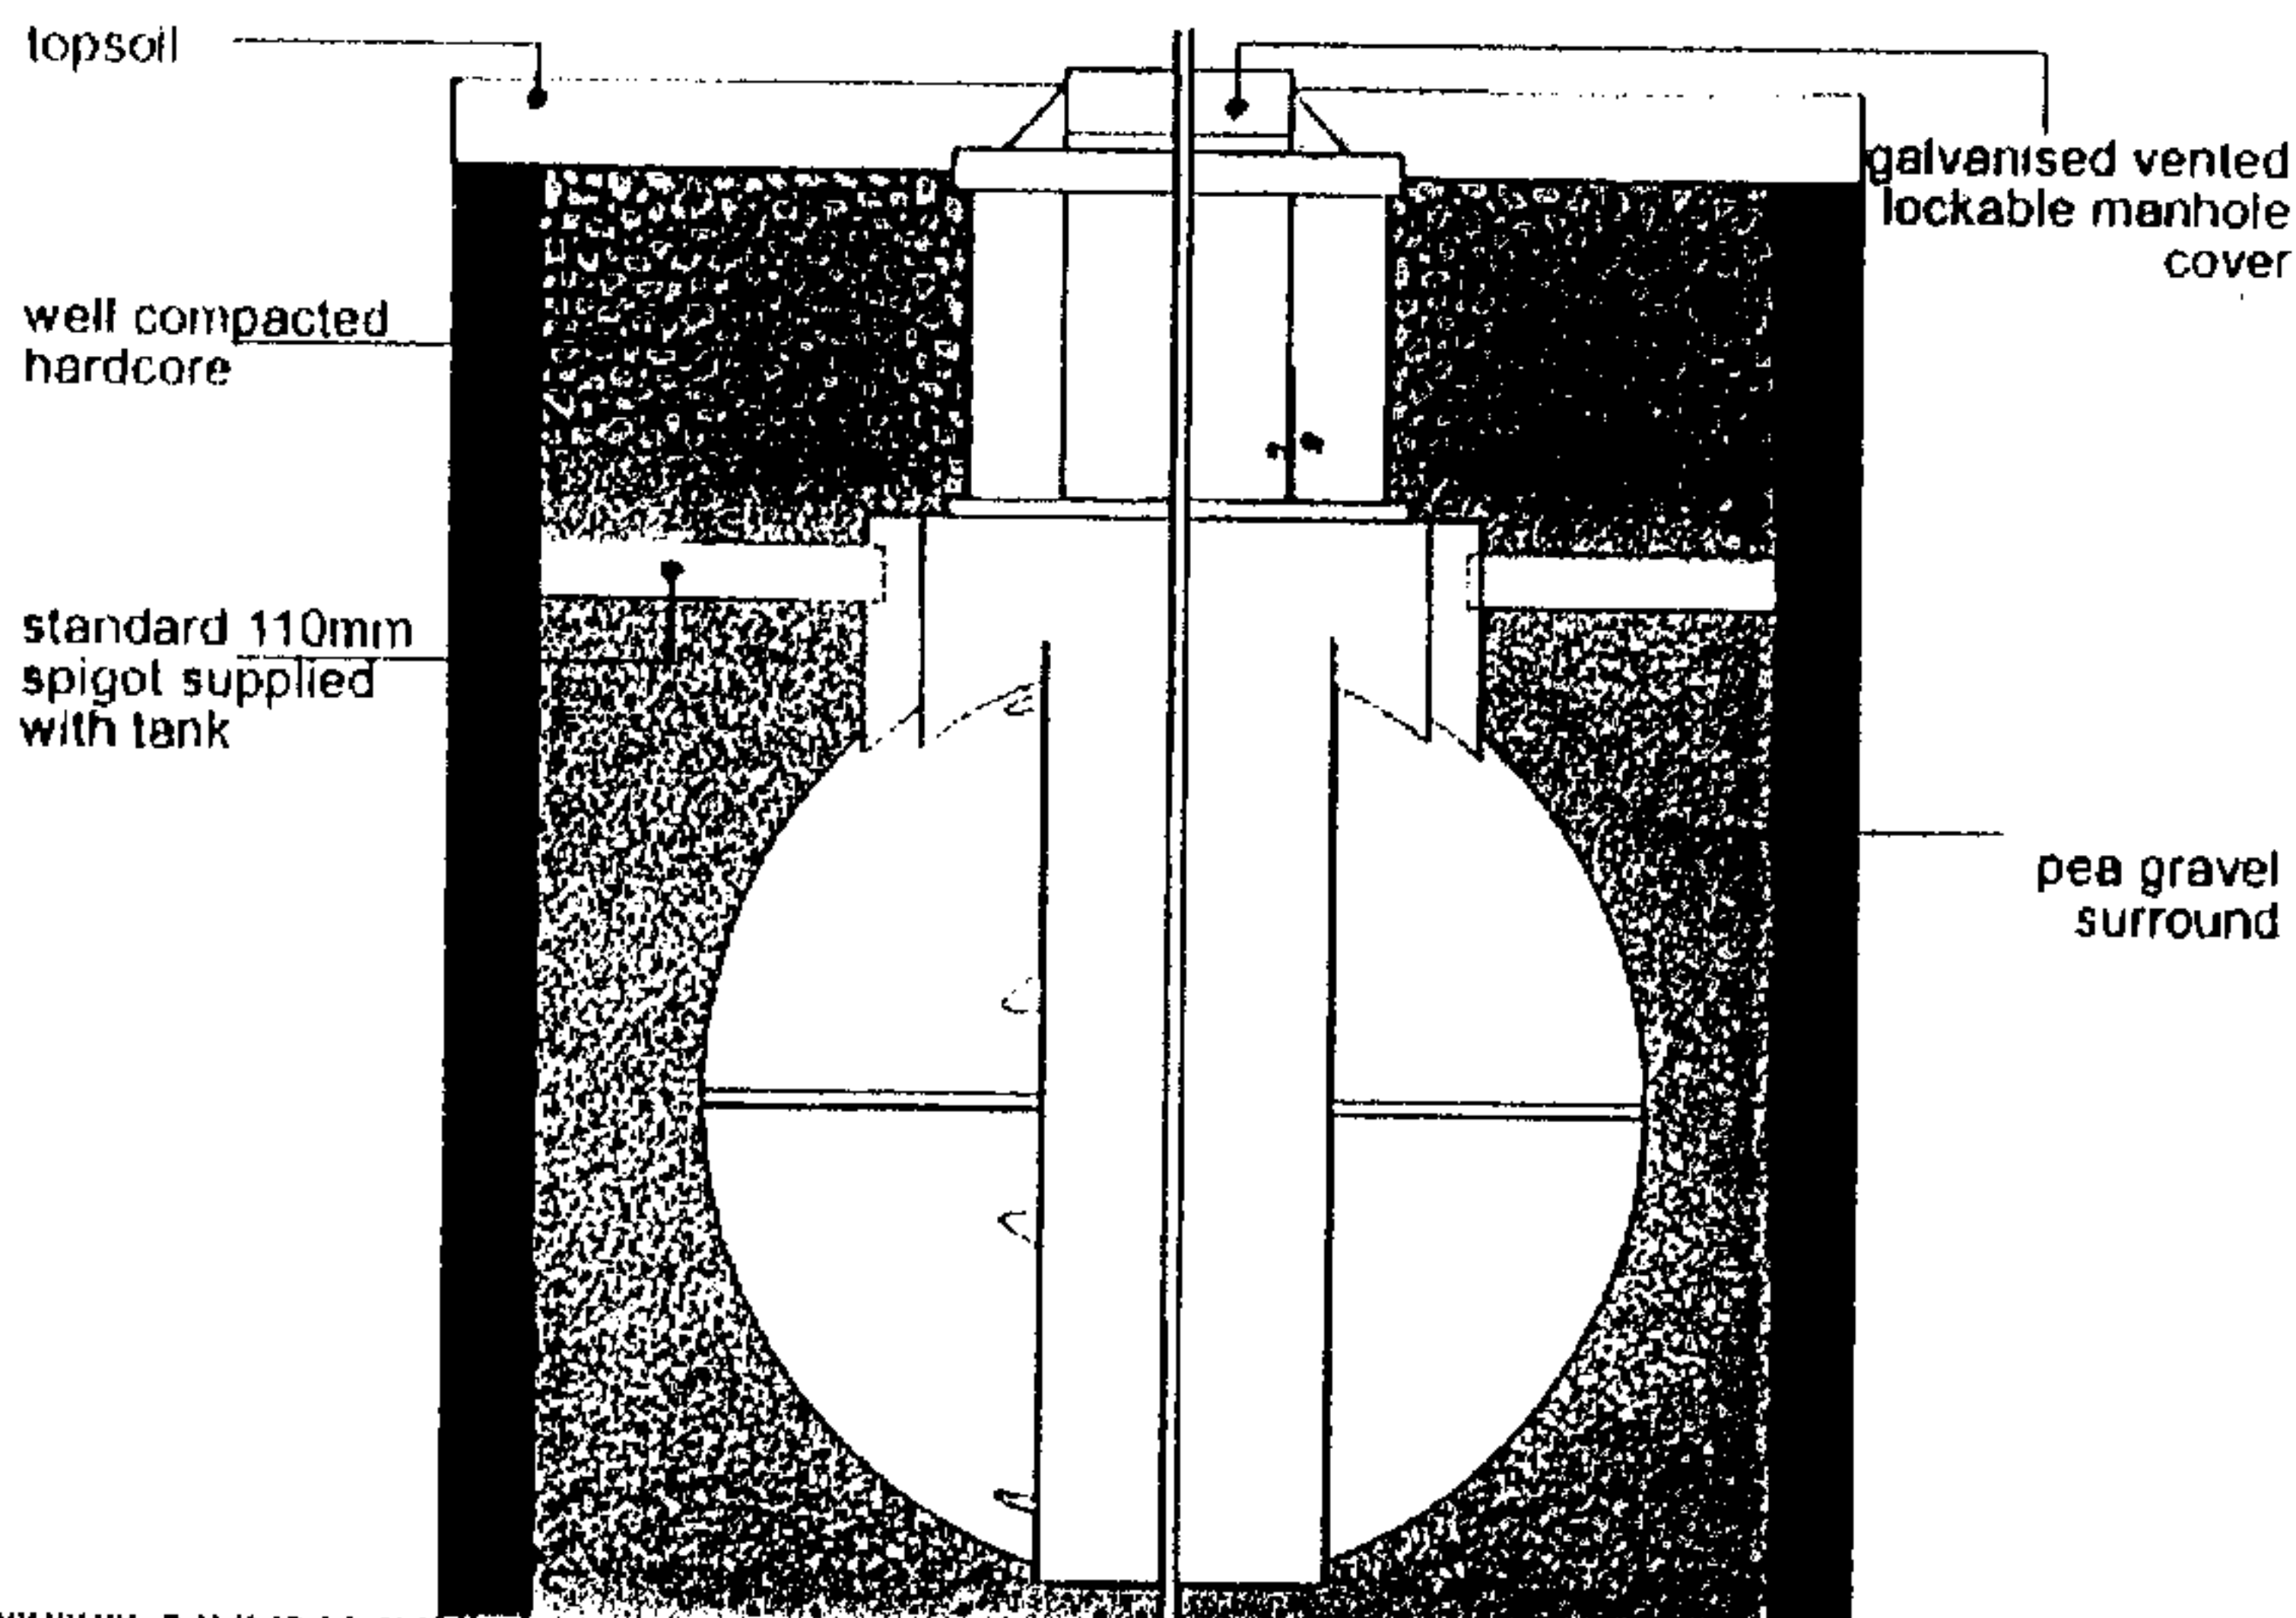

concrete 150mm
minimum

NC 05 / 3879 / F

Wet Ground Conditions

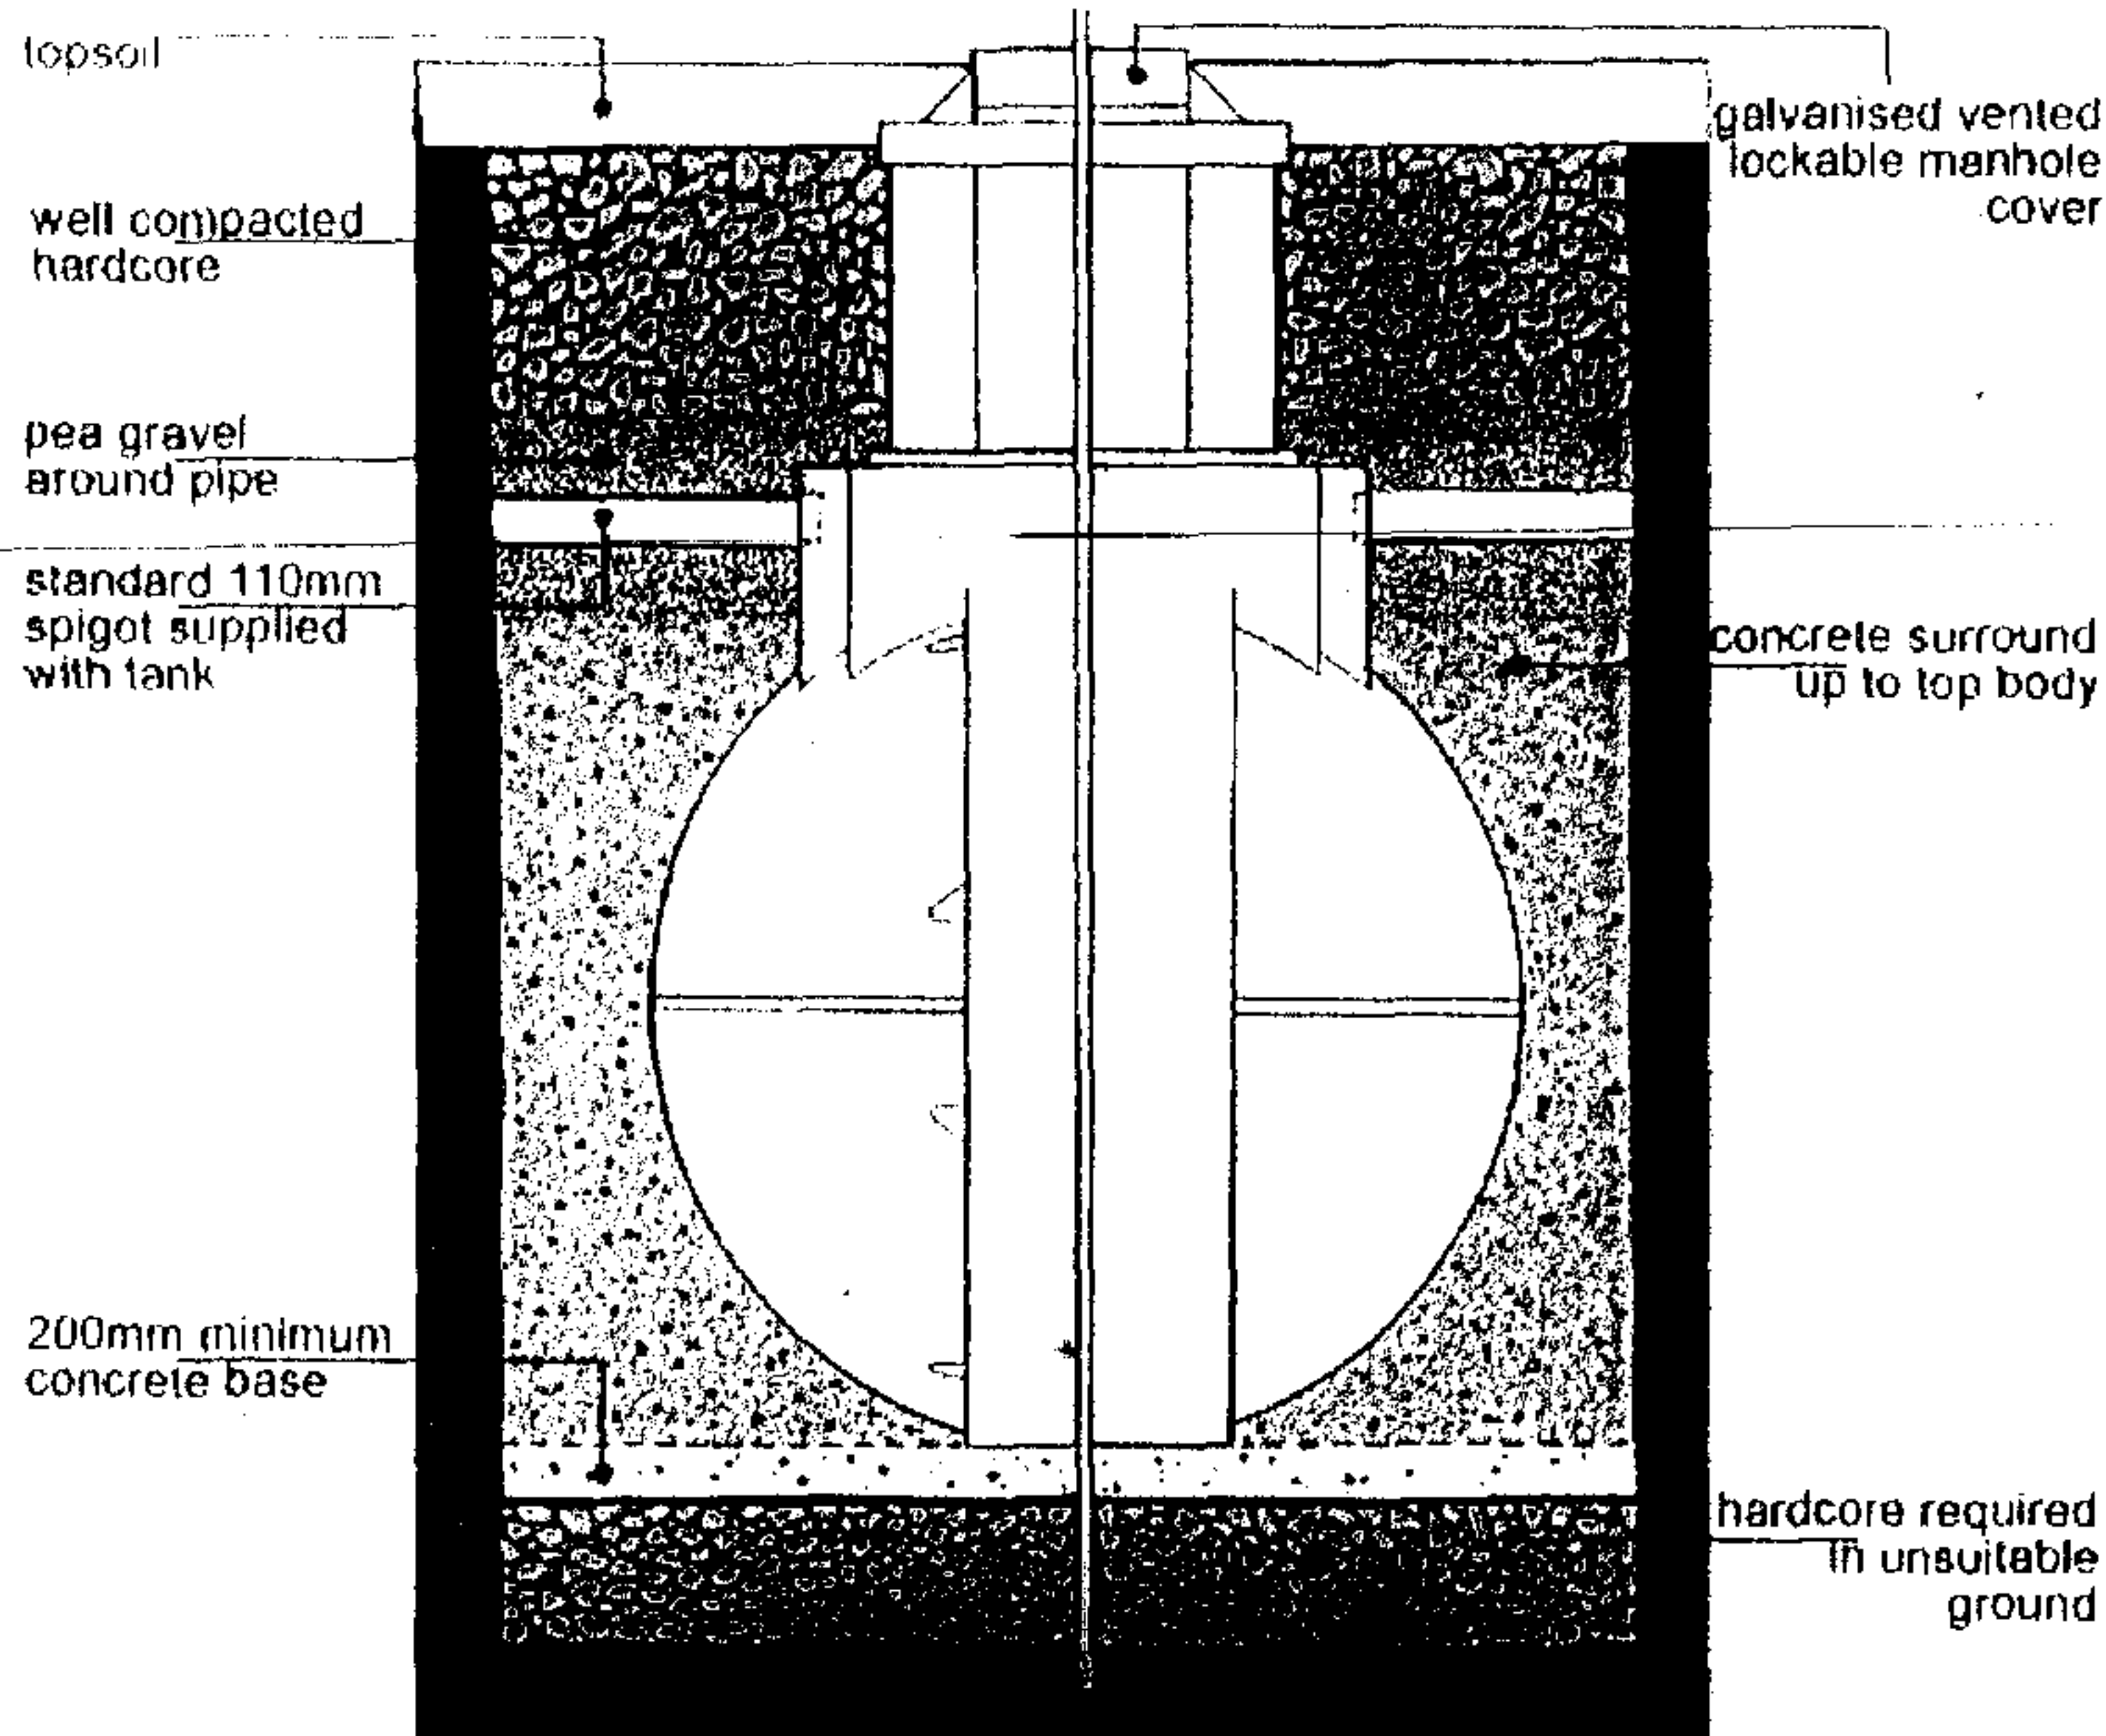

TITAN

Titan Pollution Control, 3A Carnbane Industrial Estate, Newry, Co. Down, Northern Ireland. BT35 6QJ.
Tel: dialing from Ireland: (048) 302 66799, fax: dialing from Ireland: (048) 302 60046
Tel: dialing from UK: (028) 302 66799, fax: dialing from UK: (028) 302 6004
Email: for further information

HEREFORDSHIRE & WORCESTER
PLANNING SERVICE
DEVELOPMENT CONTROL

28 NOV 2005

To:
Ack'd: File: