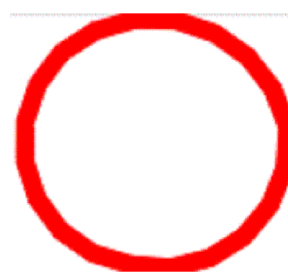

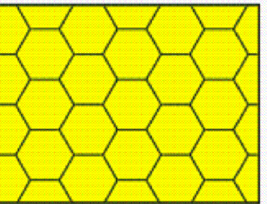




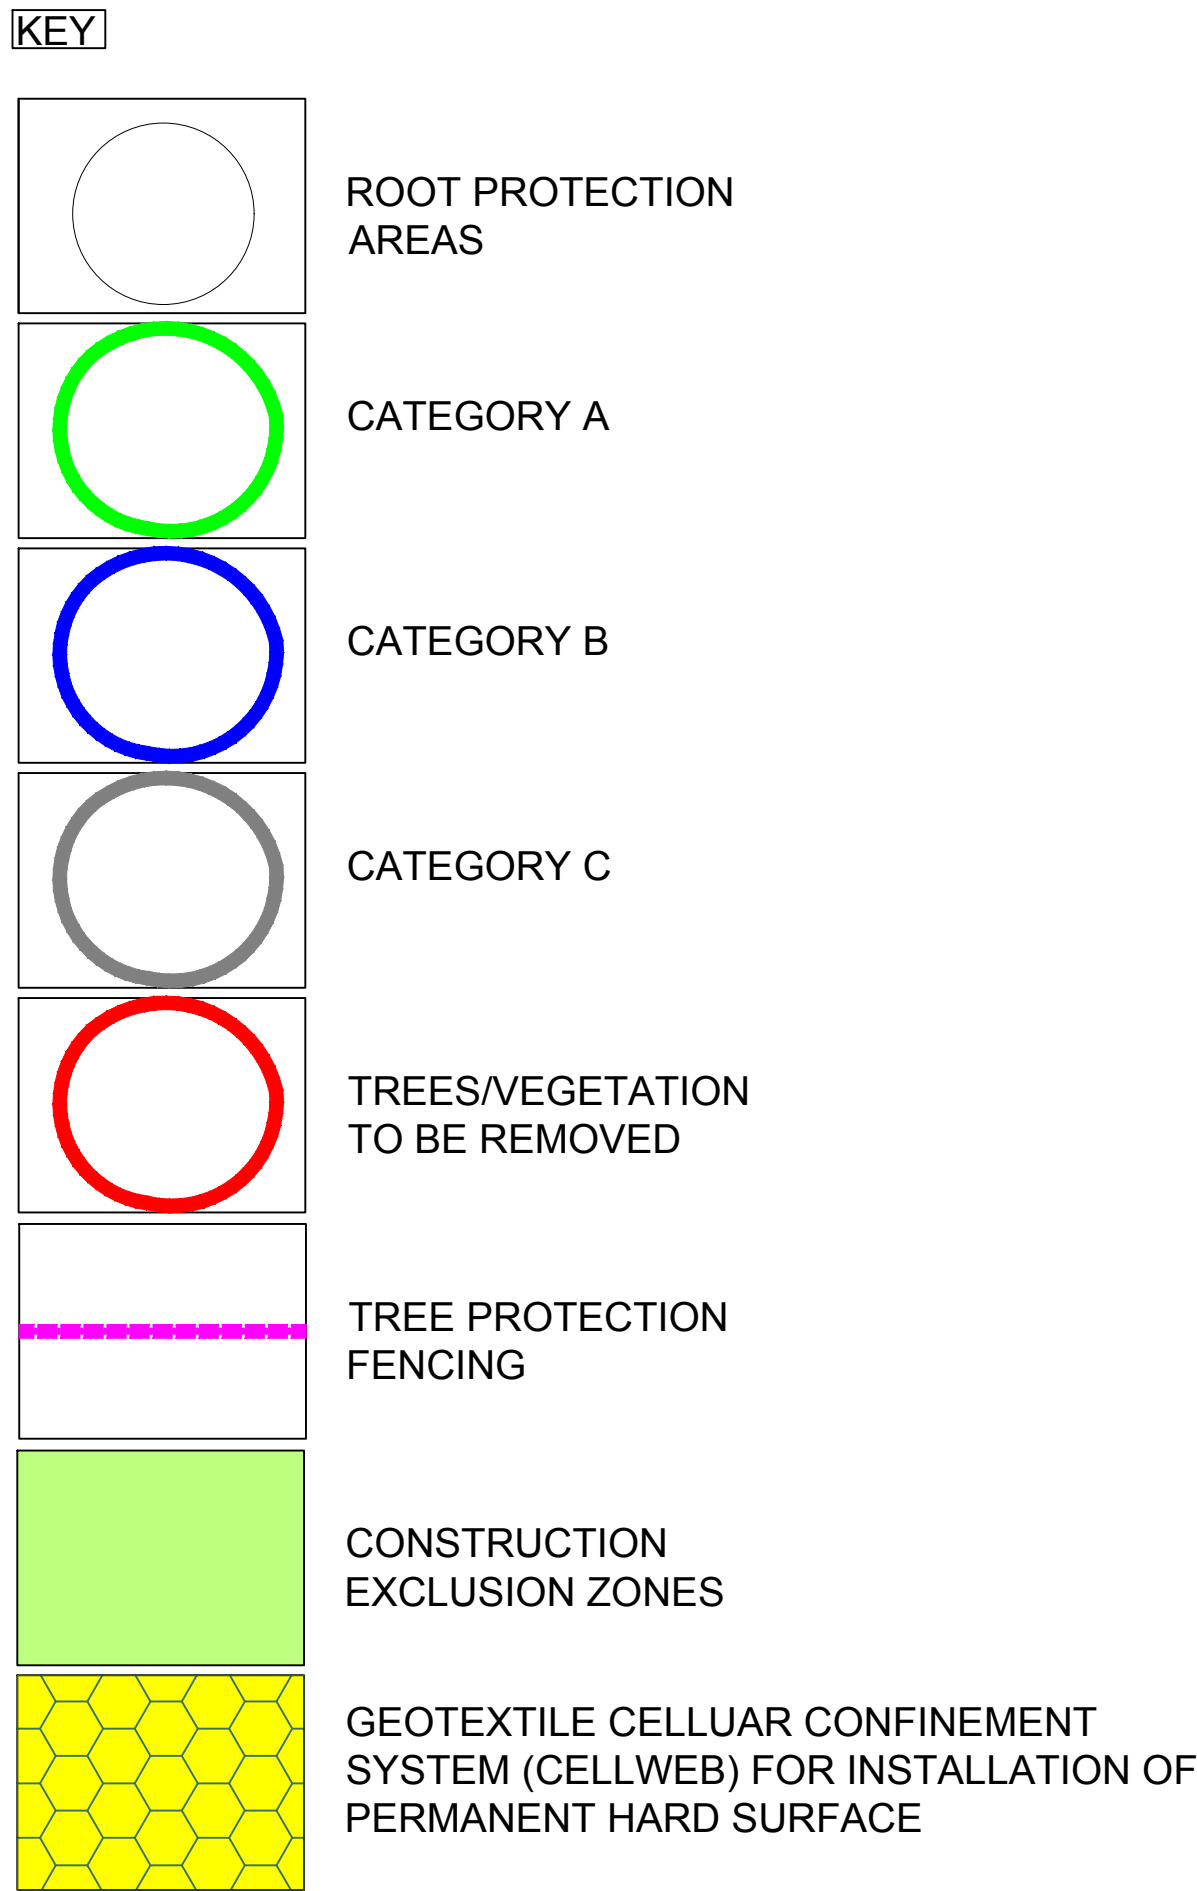
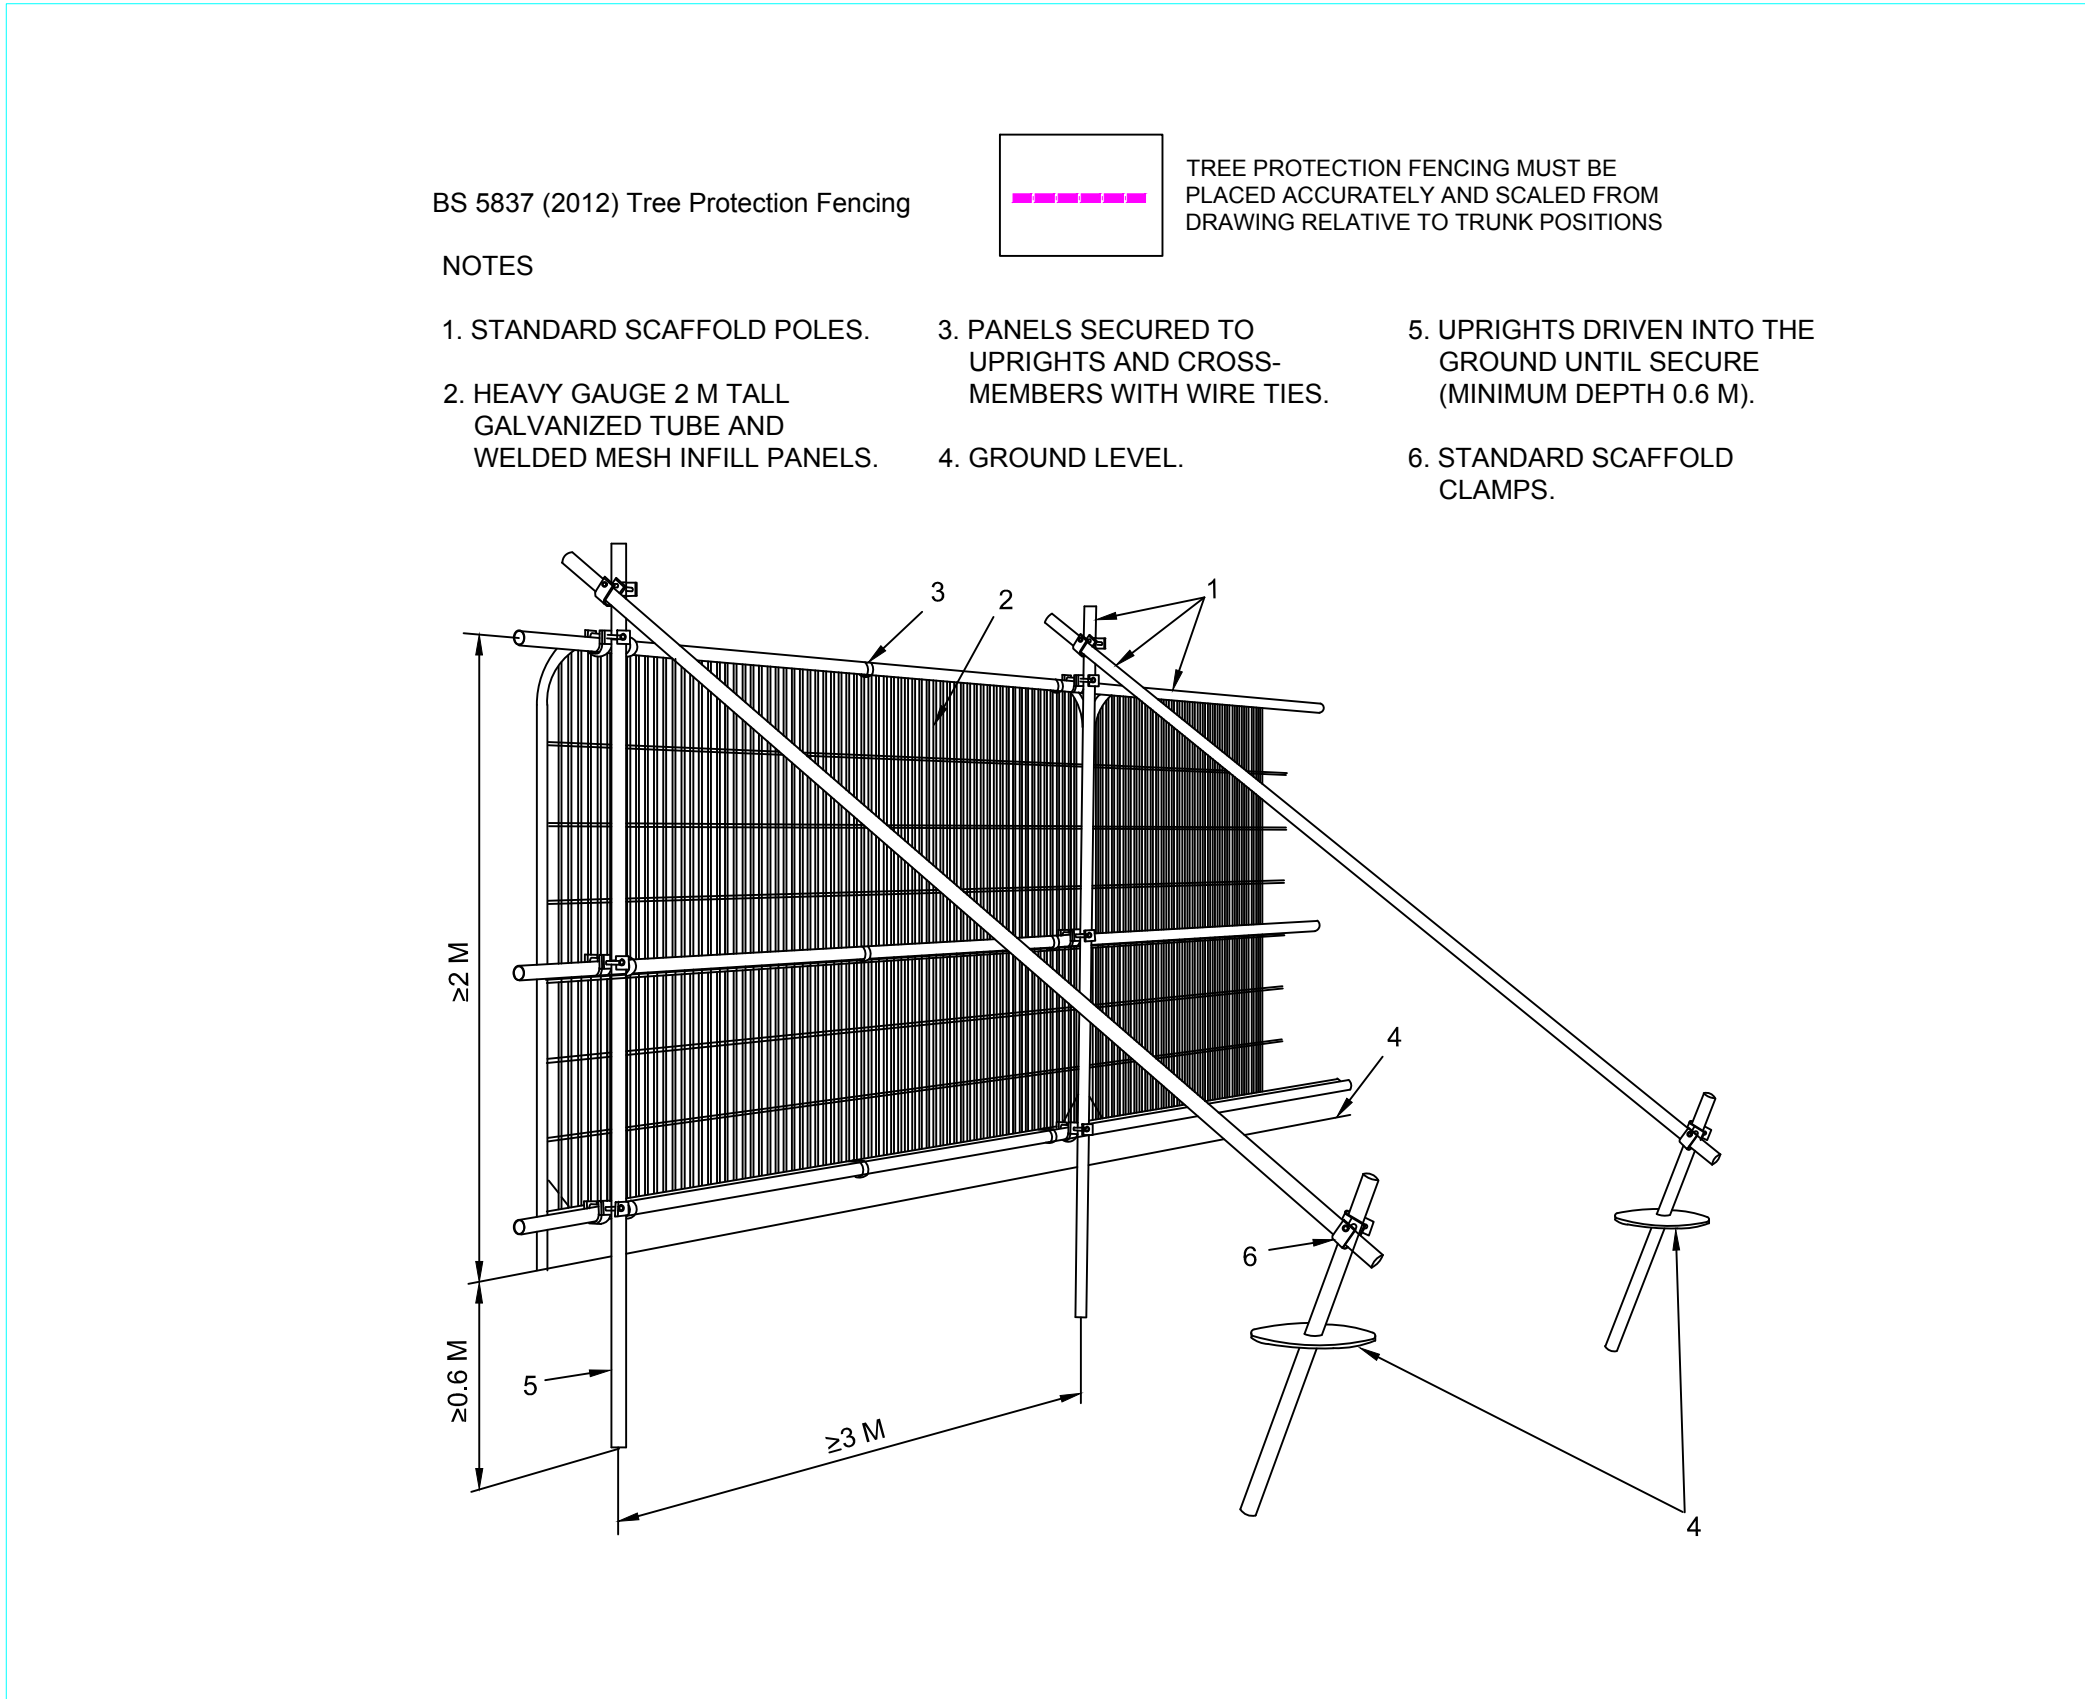
Phase	Requirements	Method								
<b>1</b>  Prior to erection of protective fencing.	Undertake tree and vegetation felling  <b>Trees/vegetation to be removed:</b>  	<p>Refer to section 5.5 of AIA/MS report.</p> <p>All tree works to be carried out to BS3998: 2010: by suitably qualified and insured professional tree surgeons.</p> <p>The following tree felling <u>must</u> be undertaken at this Phase:</p> <table border="1"><thead><tr><th colspan="2">Items requiring removal:</th></tr></thead><tbody><tr><td>9T</td><td>Apple</td></tr><tr><td>13T</td><td>Norway Maple</td></tr><tr><td>21T</td><td>Hazel</td></tr></tbody></table>	Items requiring removal:		9T	Apple	13T	Norway Maple	21T	Hazel
Items requiring removal:										
9T	Apple									
13T	Norway Maple									
21T	Hazel									
<b>2</b>  Prior to any construction works on site	Erection of protective fencing:  To retain throughout the duration of the development:  	<p>Protective fencing is to be erected in accordance with 5.6 of AIA/MS report.</p> <p>The fencing <b>must</b> comply with the positions shown in the Tree Protection Plan. A scale copy of the Tree Protection Plan must be used as reference and fencing positions measured from the Plan using a scale rule and/or using the provided distances where shown.</p> <p>No works, no storage of materials, no access, or any ground disturbance is to take place within the Tree Protection Barrier Fencing other than works specified within the Arboricultural Method Statement. <b>Fenced areas are to be treated as Construction Exclusion Zones.</b></p> <p>Warning signs to be placed on all protective fencing. For large sections of fencing the signs must be placed at 20m intervals.</p> <p>Signs must be laminated and securely attached at all corners. Two signs are to be placed side by side; copies of which are attached within <b>Appendix A</b>.</p>								
<b>3</b>  Verifying quality of protective barriers	Verify that the location and quality of tree protection barriers is adequate prior to onset of main site works.	<p>Site visit with Arboricultural Consultant and Site Manager.</p> <p>Tree Officer to be pre-informed of visit.</p> <p>In order for set works to proceed the pro-forma in <b>Appendix B</b>, of the AIA/MS report is to be completed and passed on to the local planning authority:</p> <p><b>If the protective barriers are not adequately, work is not to proceed until rectified.</b></p>								
<b>4</b>  Ongoing	Maintain protective fencing	The tree protective barrier fencing is to remain in situ during all construction works.								

Phase	Requirements	Method
<b>5</b> Installation of geotextile cellular confinement systems	Installation of three dimensional cellular confinement system. 	Installation of non-dig pavement surfaces: A three dimensional cellular confinement system is to be utilised (Cellweb). Guidance for the installation of the Cellweb is attached within <b>Appendix D</b> . Cross section details are to be provided (in conjunction with engineer and Cellweb recommendations). Technical specifications required, as well as cross section details relevant to the site can be provided by Cellweb suppliers, Geosynthetic (01455 617139). Email Sales@geosyn.co.uk. Tree barrier protective fencing is to be moved only <b>immediately prior</b> to the installation of the Cellweb. The installation is to be carried out <b>under Arboricultural Supervision</b> . The ground layer in which Cellweb is to be installed is to be subject only to removal of exiting turf layer. Adjoining levels <b>must</b> marry with the required depth of the Cellweb, not vice versa. Once Cellweb is installed any removed sections of tree protection fencing are to be <b>reinstated</b>
<b>6</b> Completion of main construction and undertaking of landscaping	Landscaping and Dismantling of tree barrier protective fencing.	It is essential that ground levels within the root protection areas are not altered, either by raising or lowering soil levels, even at the landscaping stage. Landscaping operations must be undertaken in a manner that will not impact trees. Landscaping within the root protection area of trees must be undertaken in the following manner: <ol style="list-style-type: none"><li>Any existing ground flora (grass/weeds/scrub) is to be sprayed with a systemic herbicide and left to die-off.</li><li>Dead flora is to be trimmed as hard as possible with a brush cutter or similar. The bulk of the trimmed material is to be removed by raking.</li><li>A good quality organic topsoil layer may be placed down. Small depressions may be filled (and lightly compacted underfoot). Placed topsoil soil layers <b>must not exceed</b> 100mm depth.</li><li>No plant machinery operating within the root protection areas to exceed 1 tonne gross weight and must only operate from propriety ground protection boards such as DuraMatt Access Mats (see <b>Appendix C</b>).</li><li>Turf and other planting to proceed thereafter.</li></ol>

#### TREE SURVEY SCHEDULE

Surveyed Trees	Retention Category
Reference Species	
Ref. 1T Ash	C2
Ref. 2H Hawthorn	B3
Ref. 3T English oak	A1
Ref. 4T English oak	B3
Ref. 5T Ash	B2
Ref. 6T Field maple	B3
Ref. 7W Mixed broadleaf	A3
Ref. 8T Apple	B2
Ref. 9T Apple	B2
Ref. 10H Hawthorn	B3
Ref. 11W Mixed broadleaf	A3
Ref. 12T Silver birch	B2
Ref. 13T Norway Maple	U
Ref. 14T Whitebeam	C2
Ref. 15T Hawthorn	C2
Ref. 16T Poplar	B2
Ref. 17T Bird cherry	C2
Ref. 18T Norway maple	C2
Ref. 19T Hawthorn	C2
Ref. 20T Apple	C2
Ref. 21T Hazel	C2
Ref. 22T Norway maple	C2
Ref. 23T Acer spp	C2
Ref. 24T Weeping willow	C2
Ref. 25T Weeping willow	B2
Ref. 26T English Oak	A2
Ref. 27G 3 x white willow	C3
Ref. 28T Ash	B3
Ref. 29G 2 x white willow	C3
Ref. 30H Hawthorn	B3
Ref. 31G 2 x lawson's cypress	C2
Ref. 32H Mixed hedge	C3
Ref. 33T Sycamore	B2
Ref. 34G 2 x whitebeam, 2 x sycamore, 1 x Acer negundo	C2
Ref. 35T Holly	C2
Ref. 36G 2 x crab apple, 1 x Acer spp, 1 x liquidambar, 1 x sycamore	B2
Ref. 37T Norway maple 'Crimson King'	B2
Ref. 38T Crab apple	C2
Ref. 39T Hazel	C2
Ref. 40T Apple	C3

THIS DRAWING MUST BE VIEWED IN COLOUR AND READ IN CONJUNCTION WITH THE ARBORICULTURAL IMPACT ASSESSMENT AND METHOD STATEMENT



No dimension to be scaled from this drawing © copyright reserved		Date	Rev	Dwn
Landscape Architecture Arboriculture				
Trevor Bridge Associates Ltd Aston Old Batts Stamford Street West Aston-under-Lyne Lancs OL6 7FW				
Tel: 0161-804 2099 E-mail: info@trevorbridge.co.uk				
Project STANLEY HOUSE, BOSBURY LANE, BOSBURY ELYSIUM HEALTHCARE				
Title TREE PROTECTION PLAN				
Date DEC 19	Scale(s) 1:500 @ A0	Dwg no 5749.02	Rev	
Dwn PD	Chkd MG			